



P/N: AMT-CIR1525-16

Technique Specifications

	Frequency range	15.0-25.0GHz	
	Bandwidth	Full	
	Operating Temp	+25°C	-30~+70°C
	Insertion Loss	≤0.9 dB	≤ 1.0dB
	Isolation	≥16dB	≥15dB
	VSWR	≤ 1.40	≤ 1.50
	Power Rating	3W/AV	
	Connector Type	2.92-Female	
	Direction	Clockwise:1→2→3	

Outline(mm)


Tolerance: ±0.15mm

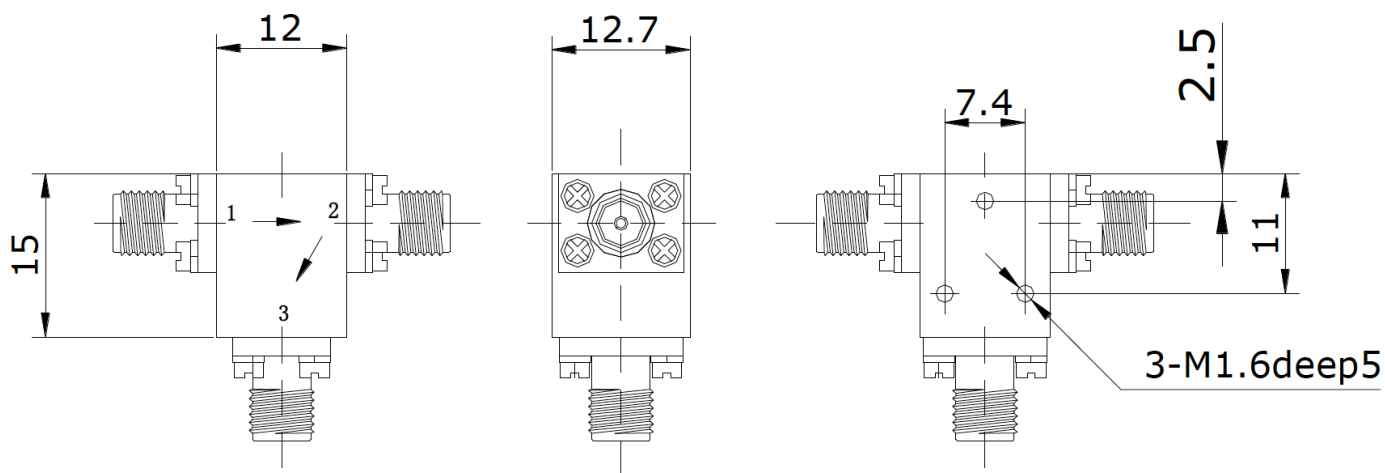


Test Result

S/N:228233


Port 1→port 2

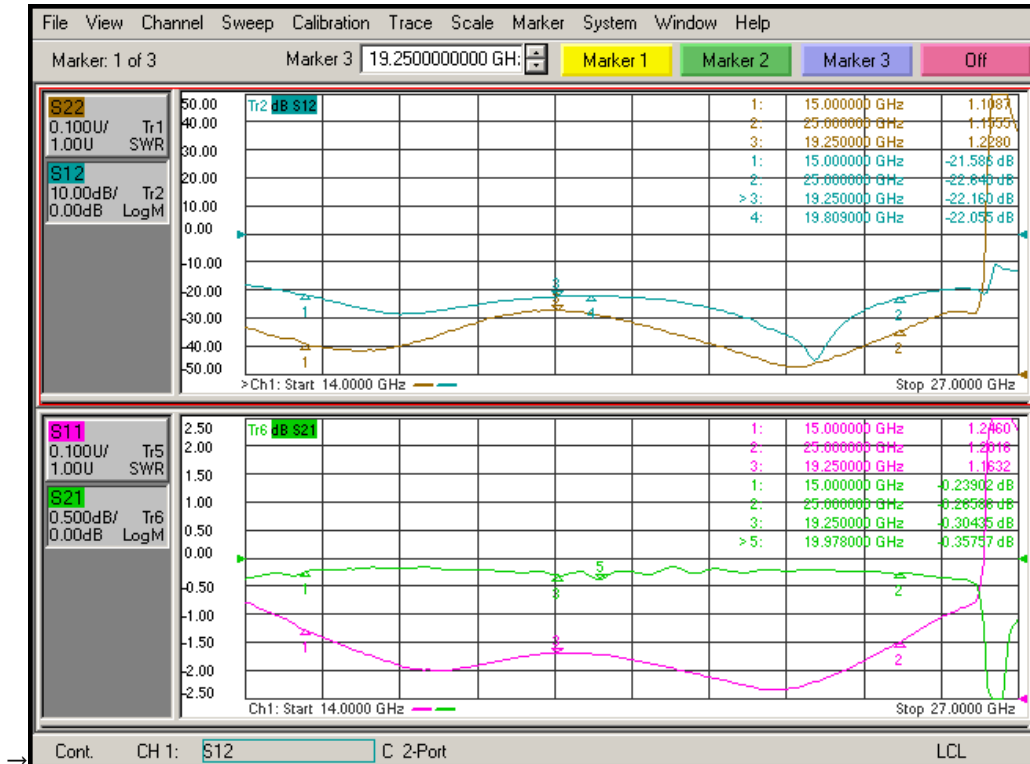

Port 2→port 3

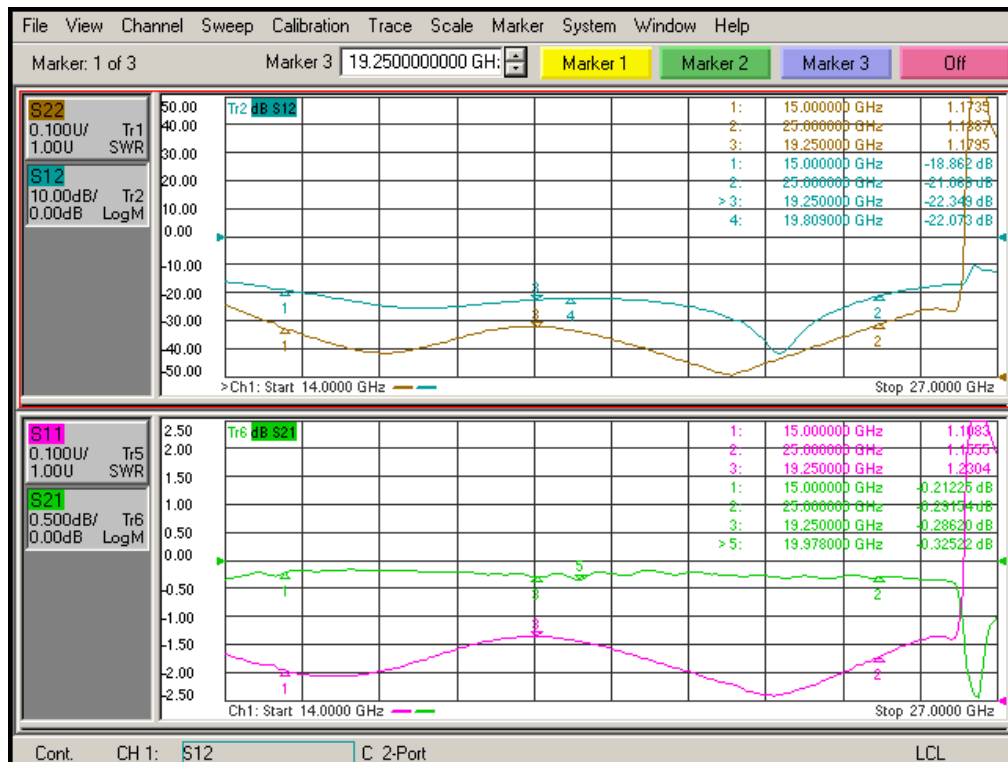


Port 3→port 1

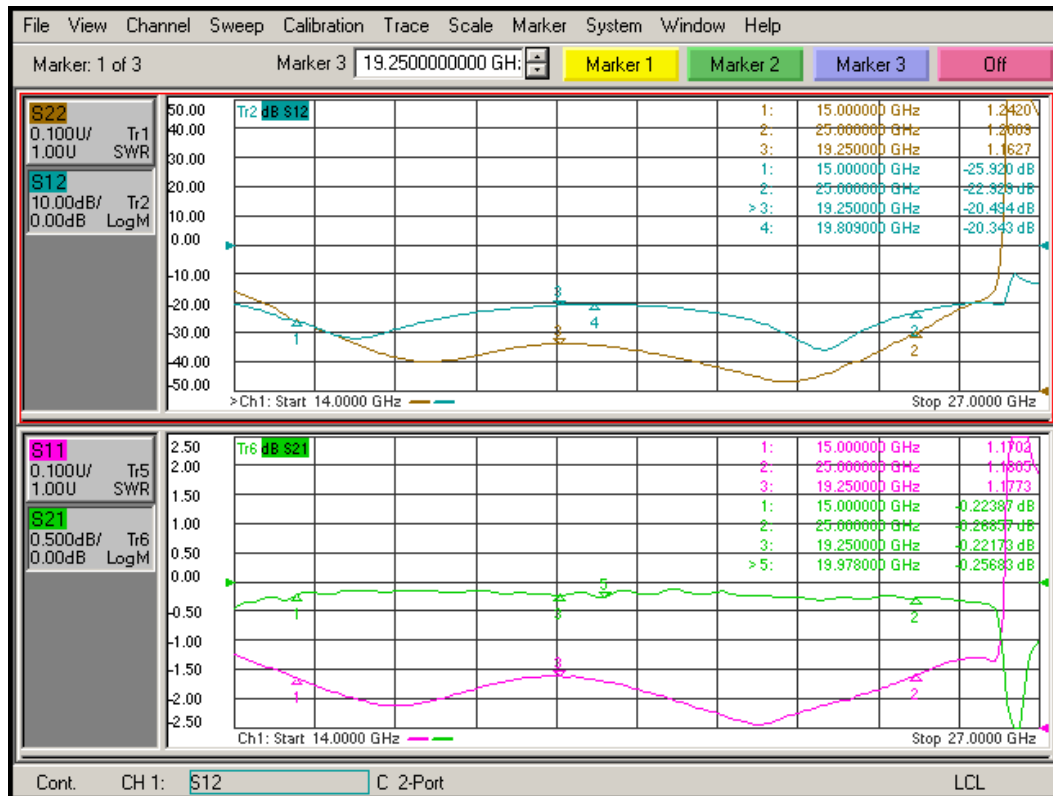


S/N:228234


Port 1→port 2

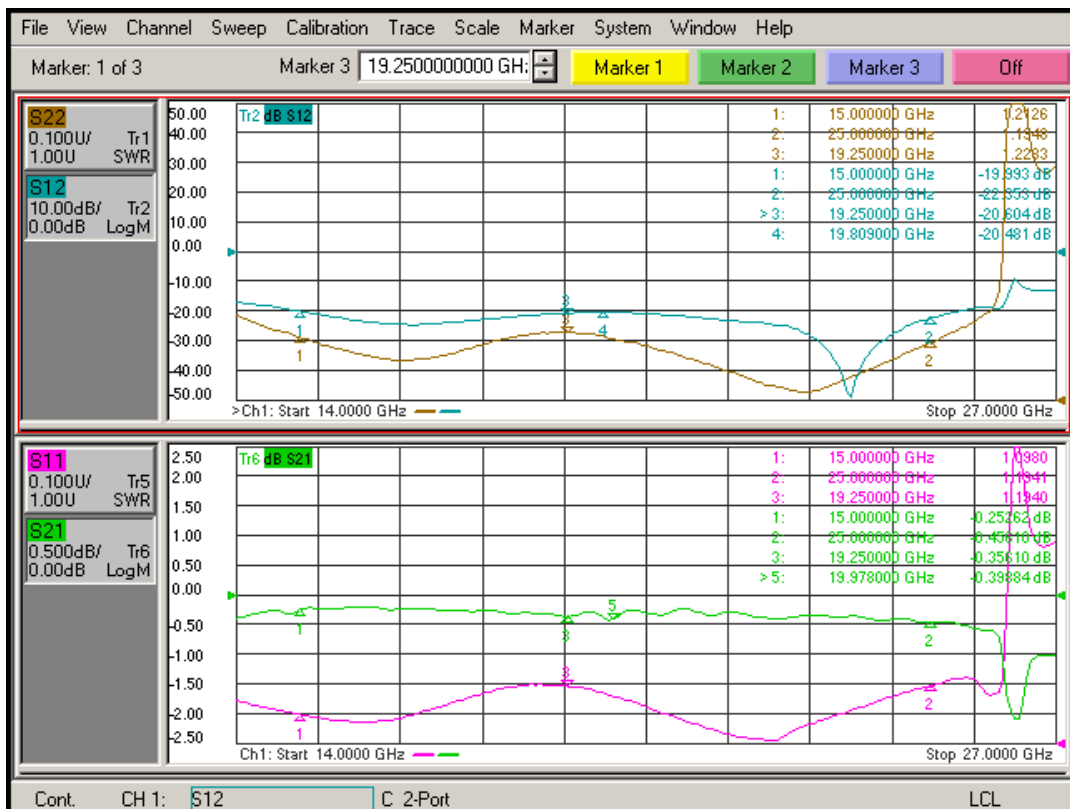

Port 2→port 3

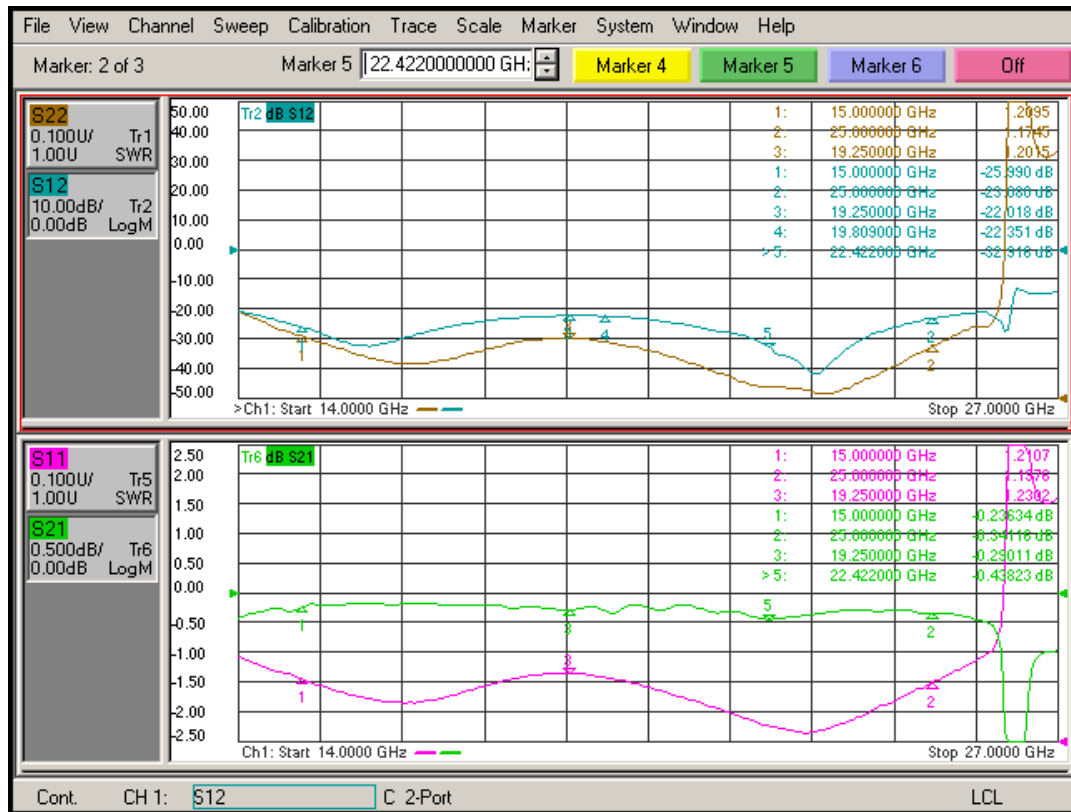


Port 3→port 1

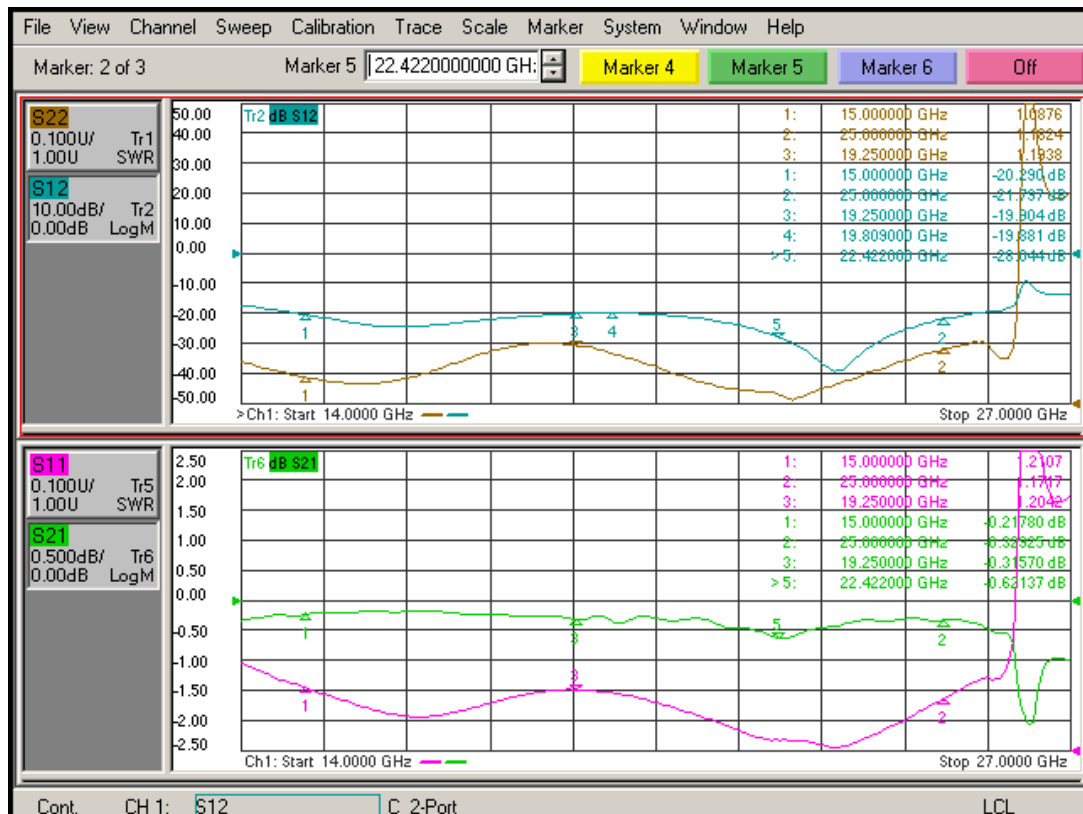

S/N:228235
Port 1–port 2




Port 3–port 1

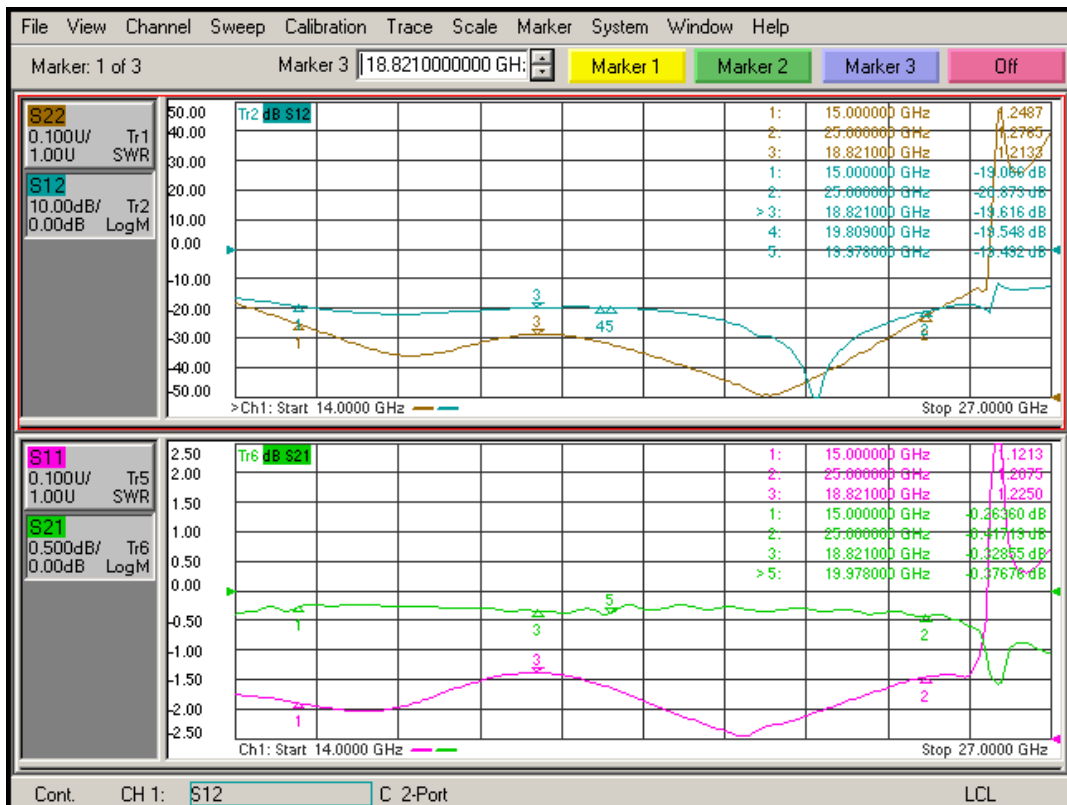


S/N:228236


Port 1→port 2

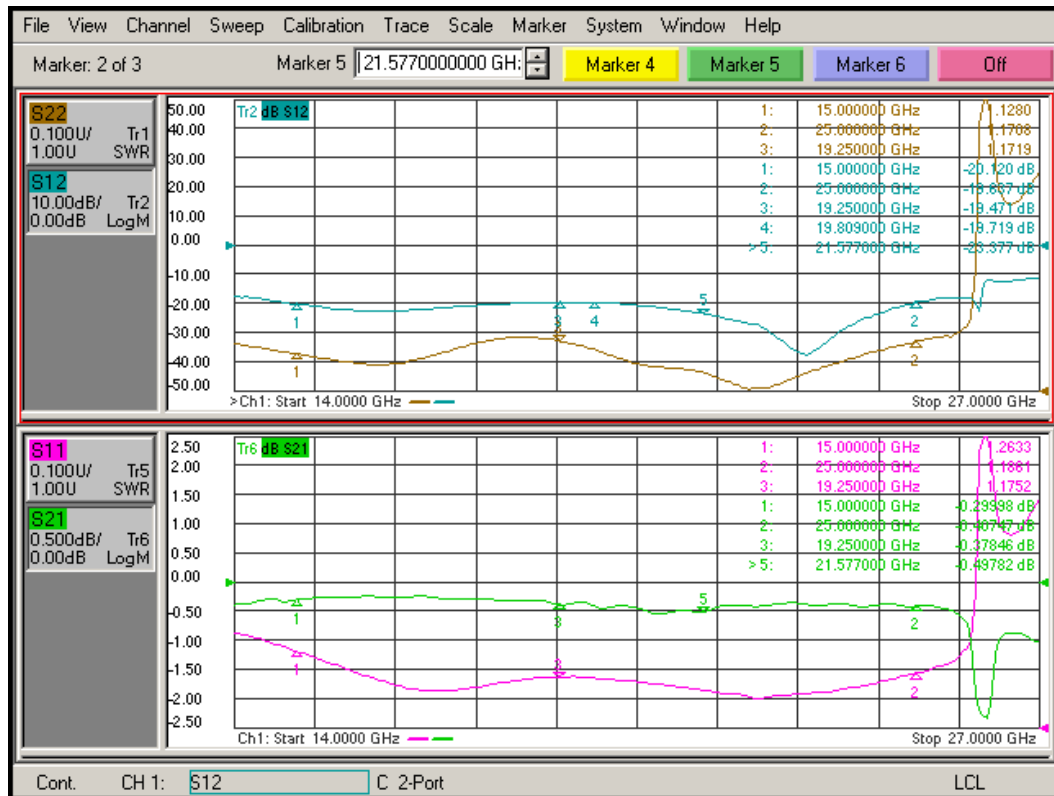

Port 2→port 3

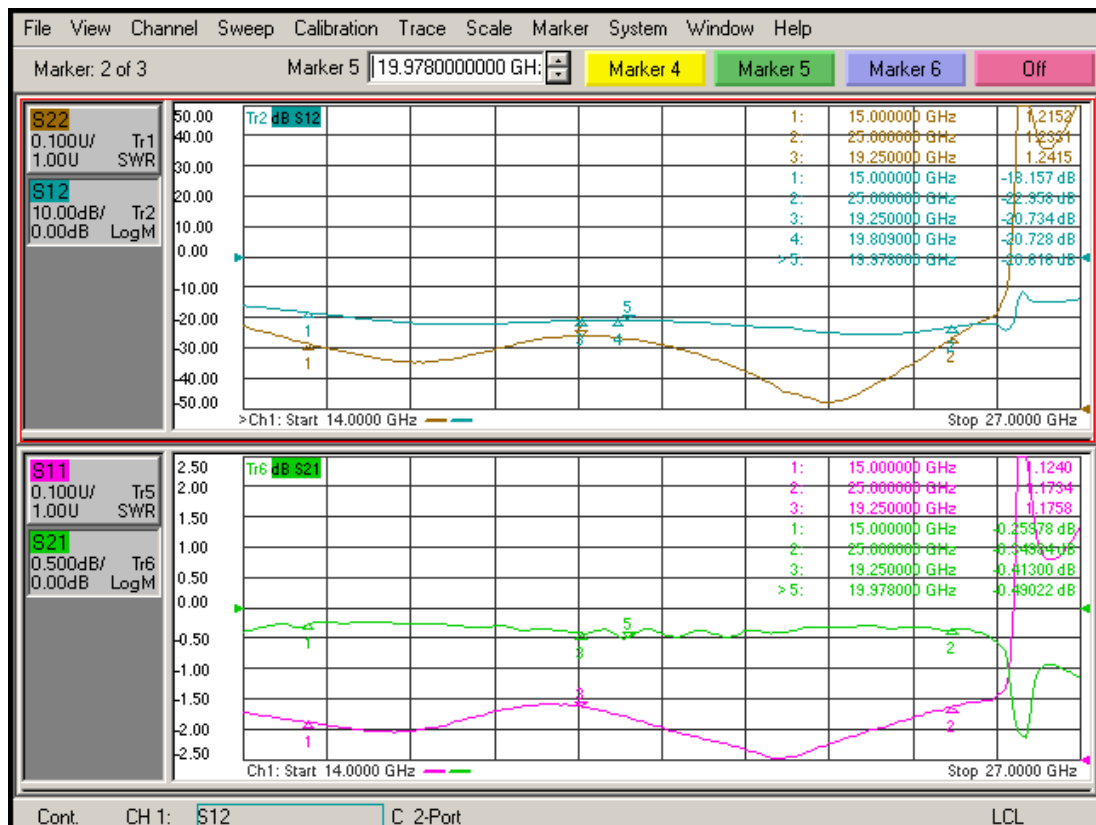


Port 3→Port 1

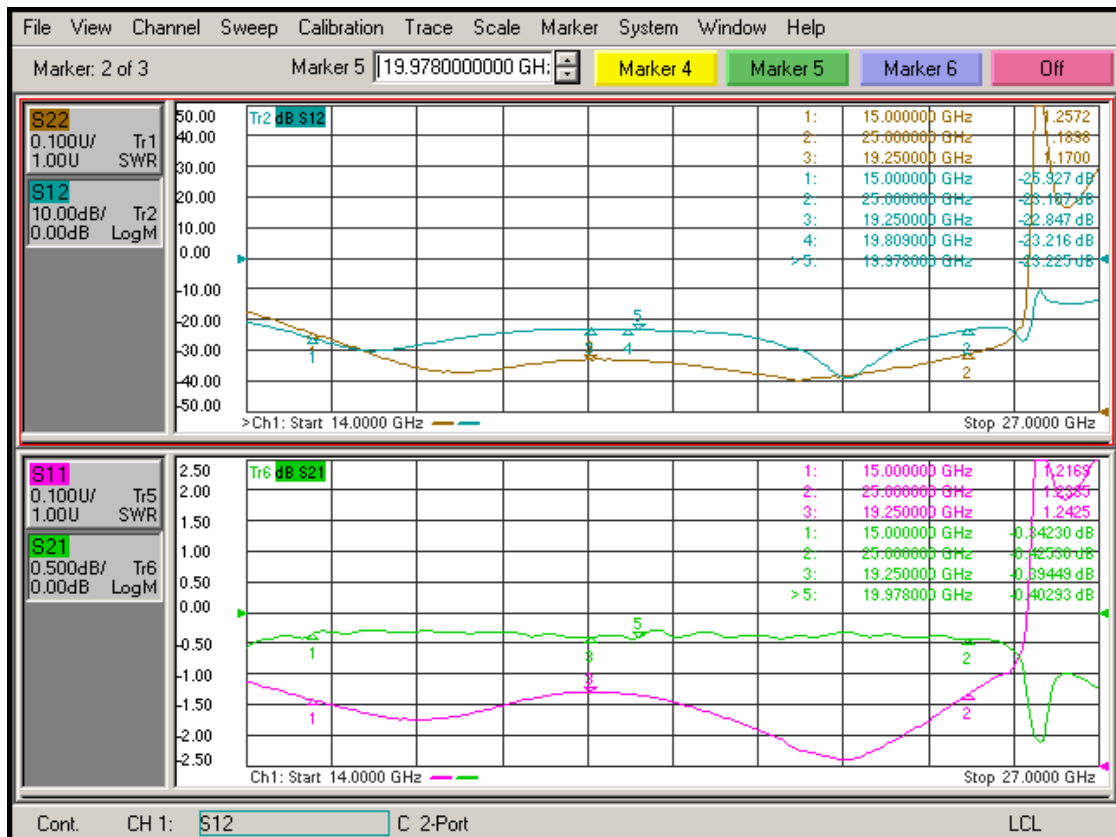

S/N:228237


Port 1→Port 2

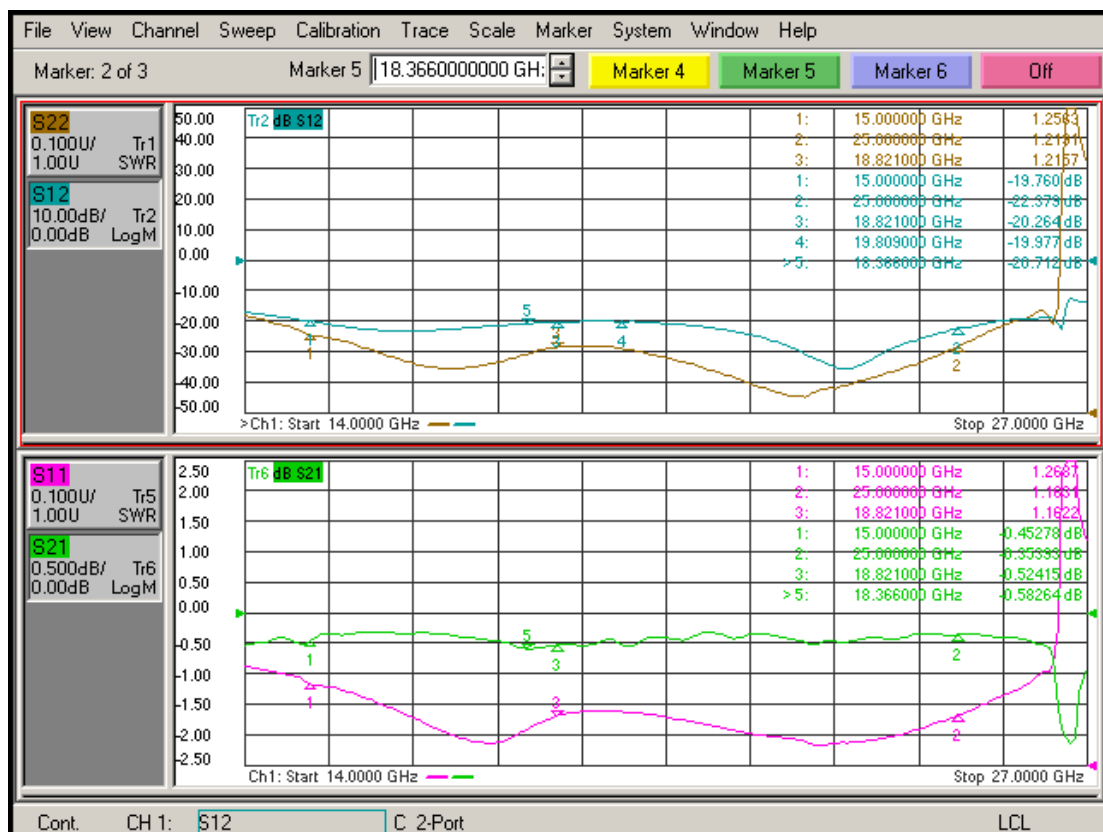

Port 2→Port 3




Port 3→Port 1

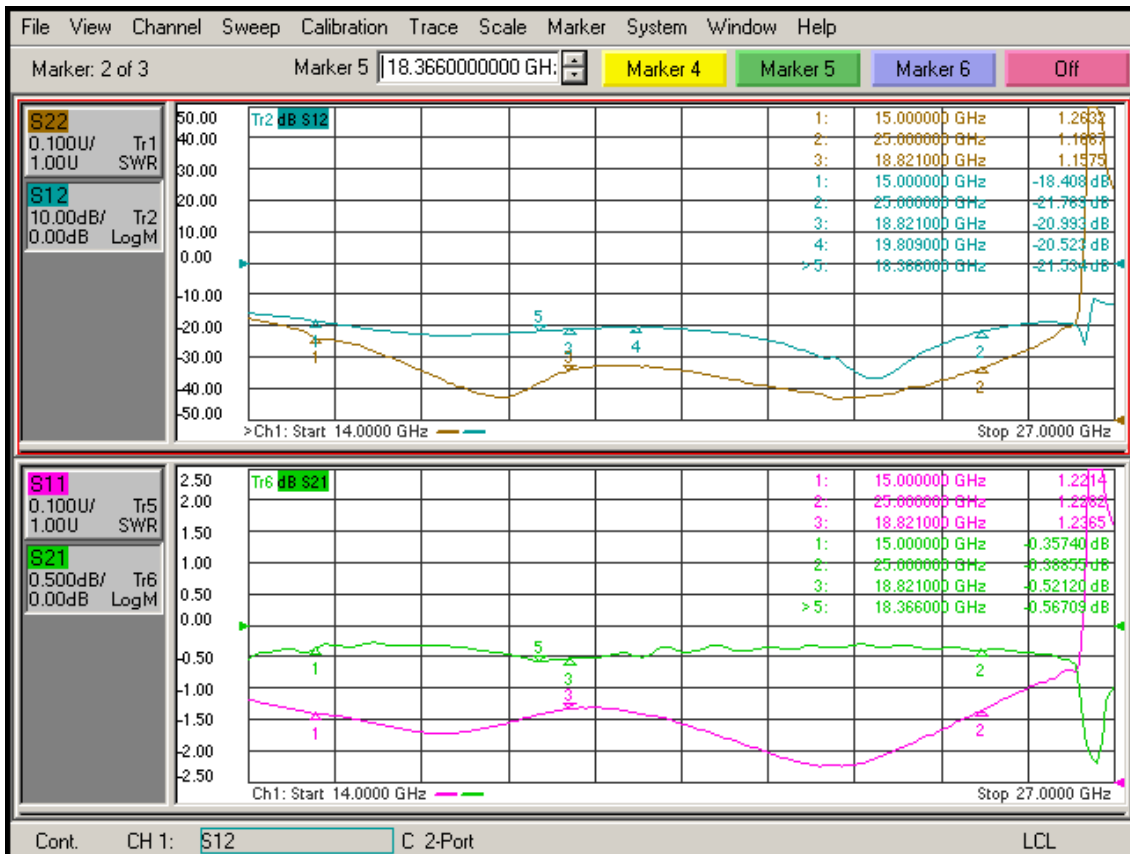

S/N:228238

Port 2→Port 3

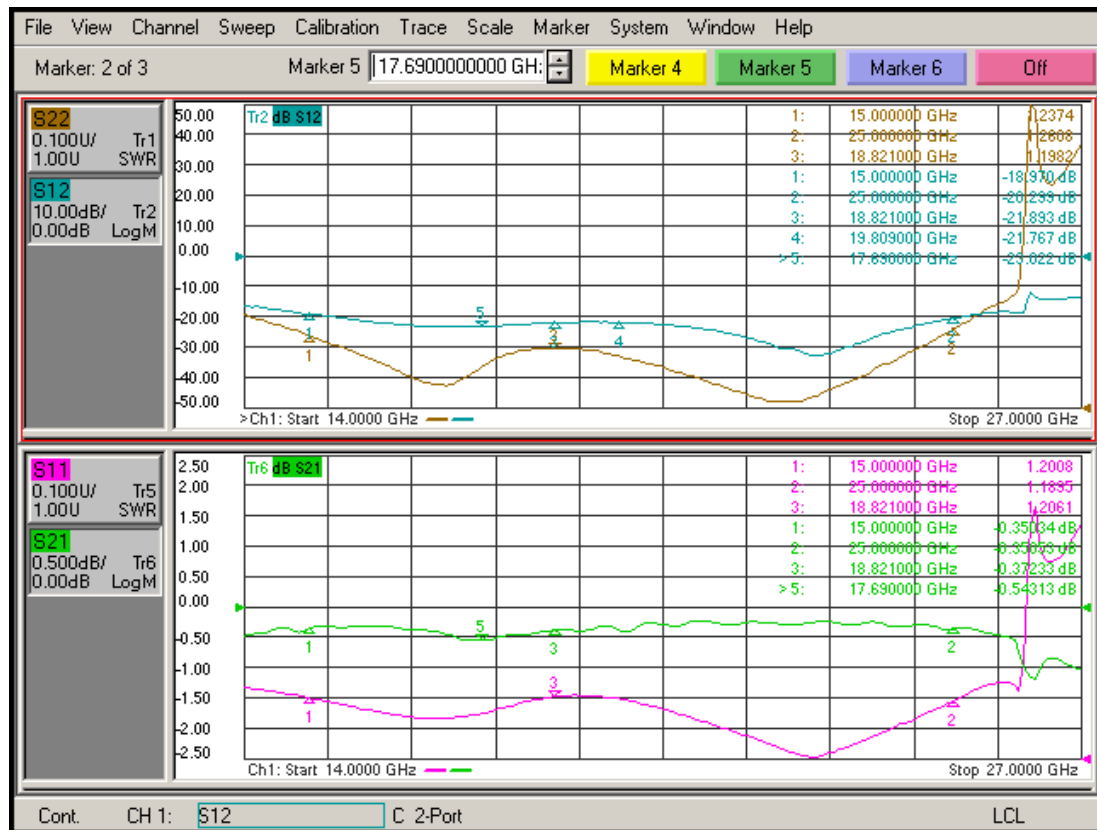

Port 3→Port 1

