



P/N: AMT-ISO70124-18

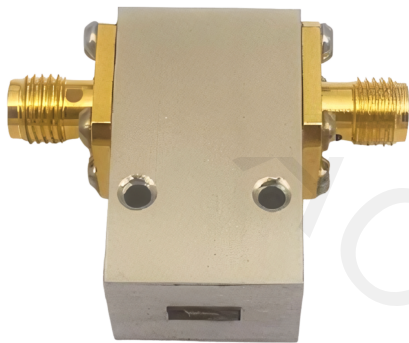

Frequency Range	7-12.4GHz
Bandwidth	Full
Insertion Loss	≤0.4dB @+25℃
Isolation	≥18dB @+25℃
VSWR	≤ 1.30 @+25℃
Forward Power Rating	10W CW ;
Reverse Power Rating	2W CW
Connector Type	SMA-Female (Gold-plated brass)
Body material	Aluminum oxidation
External body material	Nickel plated iron
Impedance	50 Ohms
Operating Temp	-20~+60℃: (0.5dB/17dB/1.35)
Direction	Clockwise:→
Weight	25g

Outline(mm)

Tolerance: $\pm 0.15\text{mm}$

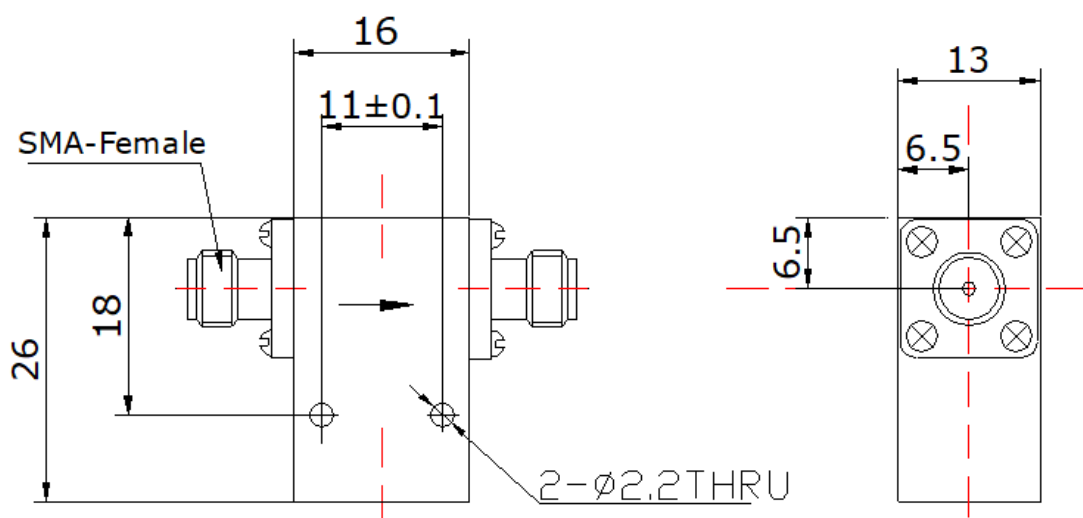



Test Result

The test plot of 6-12GHz for reference only.

