
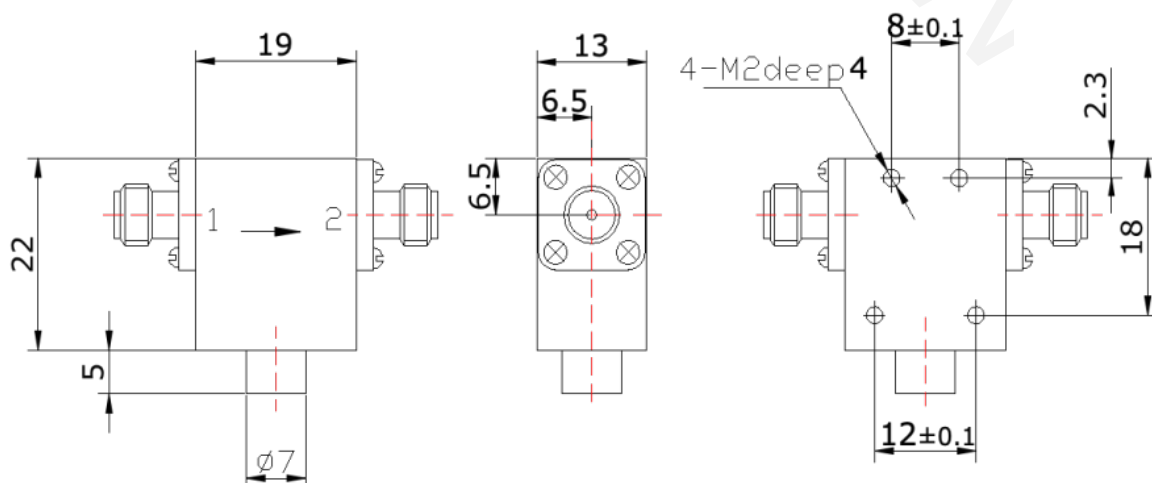


**P/N: AMT-ISO60180-11-5**
**Technique Specification**


	Frequency Range(GHz)	6-18
	Insertion Loss(dB)	1.1 Max.
	Isolation(dB)	11 Min.
	VSWR	1.7 Max.
	Forward Power, CW, (W)	5 (Design guaranteed, verified with the system)
	Reverse Power, CW, (W)	5 (Design guaranteed, verified with the system)
	Impedance	50 ohms
	Direction	Clockwise
	Connector	SMA-female
	Operating Temp.( °C)	-30~+70

**Outline(Size: mm)**




### Test Result

### Isolation

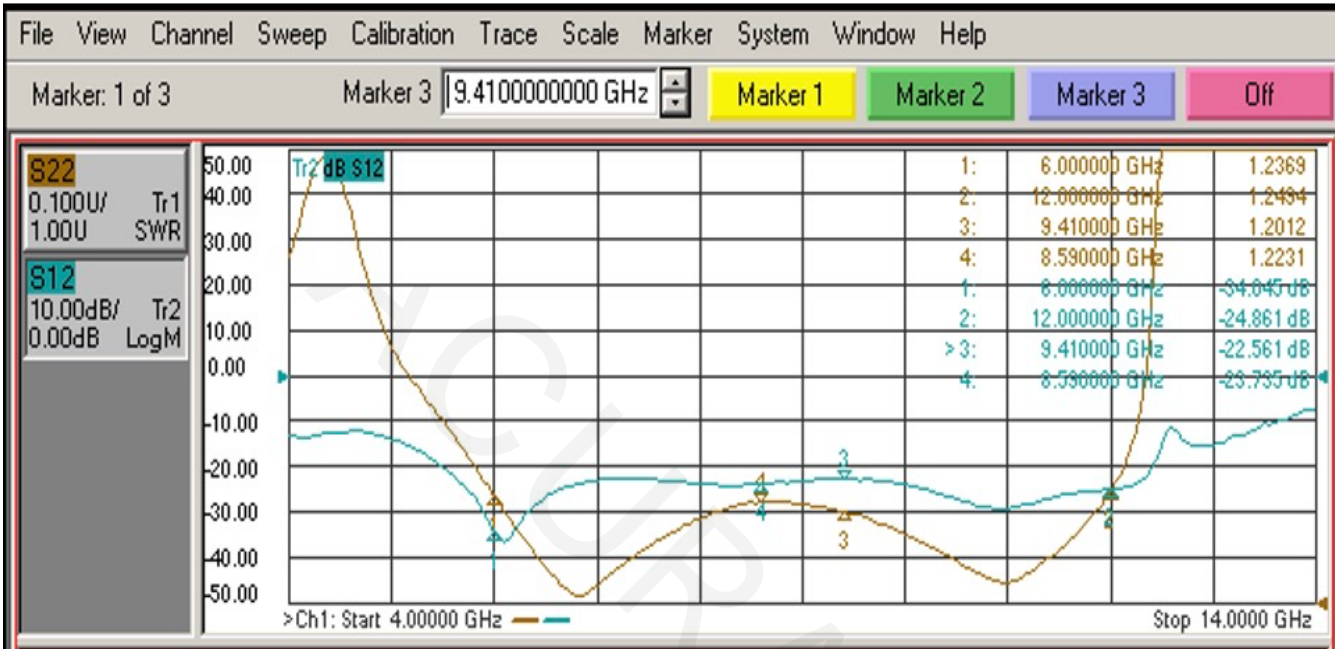

### Insertion Loss & VSWR

