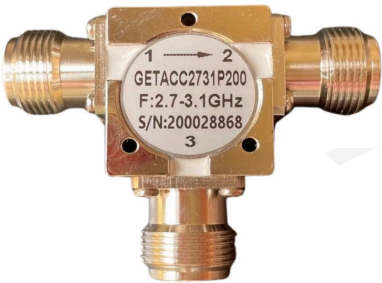


P/N: AMT-CIR2731-20-200

Technique Specifications

	Frequency Range(GHz)	2.7 – 3.1	
	Bandwidth	Full	
	Operating Temp.	25°C	-50 ~ +75°C
	Insertion Loss(dB)	0.4 Max.	0.5 Max.
	Isolation(dB)	20 Min.	17 Min.
	VSWR	1.25 Max.	1.35 Max.
	Forward Power Rating(W)	200W/CW; 2000W/PK	
	Impedance(Ohms)	50	
	Connector	N-Female	
	Direction	Clockwise:1→2→3	

Outline Drawing (Size: mm)

Tolerance: ±0.2mm

